


CE-E



COATES HEATER CO. INC.
P.O BOX 1750
KENT, WA 98035
Phone (253) 872-7256
Fax (253) 859-4660

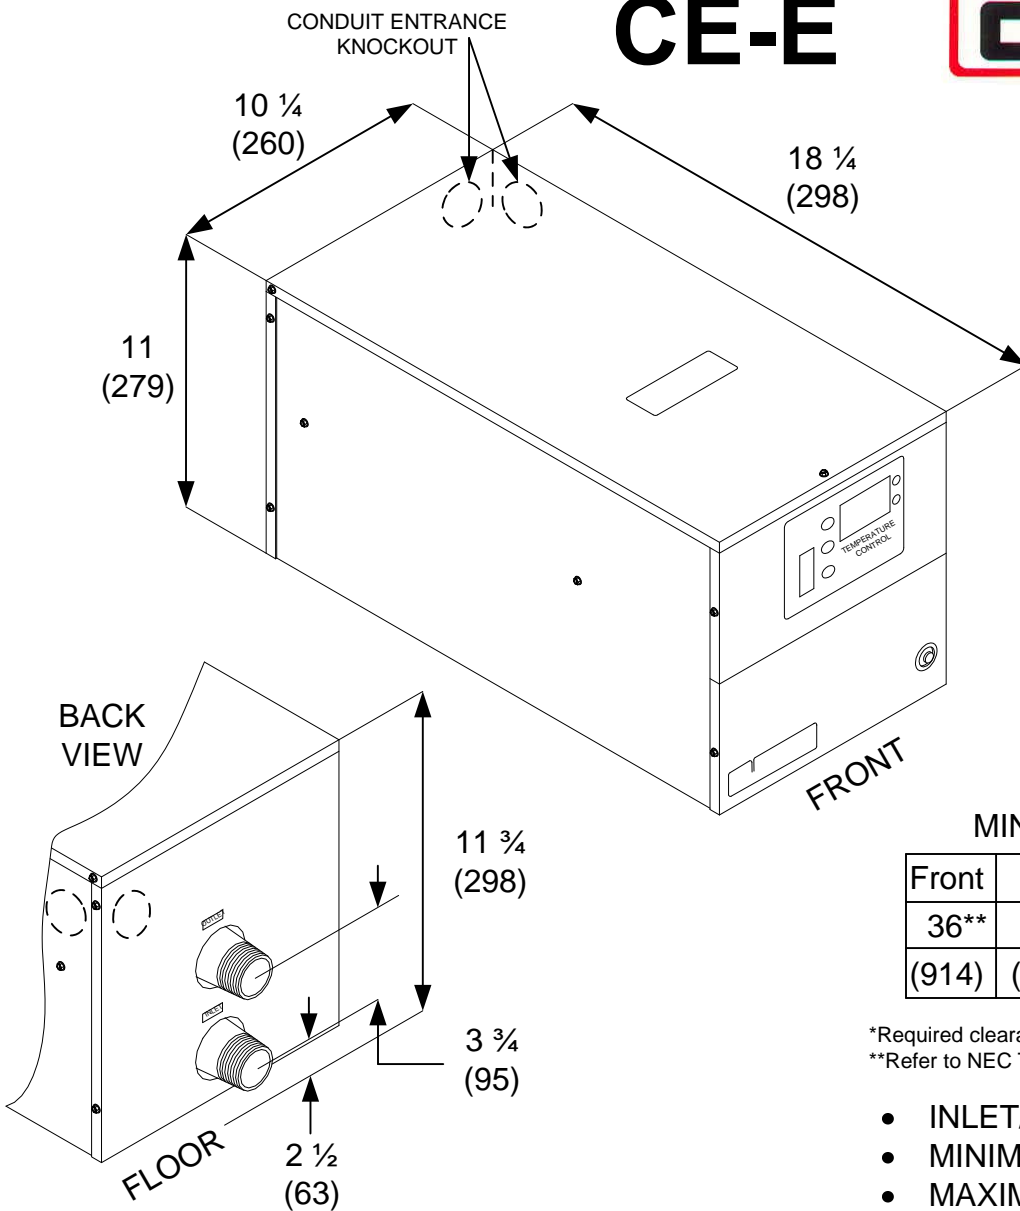

Dimensions: Inches (mm)

MINIMUM CLEARANCES

Front	Left	Right	Top	Back
36**	4	4	20	*Plumbing
(914)	(102)	(102)	(508)	

*Required clearance is based on plumbing configuration used.
**Refer to NEC Table 110.26 (A)(1)

- INLET/OUTLET 1 1/2 " (38mm) NPT
- MINIMUM FLOW RATE 20 GPM
- MAXIMUM FLOW RATE 80 GPM

MODEL	PHASE	VOLTS	kW	AMPS	BREAKER	WIRE/ 75°C	SHIP WT.
32212CE	3	220	12	31	40	#8	42 lbs. (19 kg)
32215CE	3	220	15	39	50	#8	42 lbs. (19 kg)
32218CE	3	220	18	47	60	#6	42 lbs. (19 kg)
33812CE	3	380	12	18	25	#10	45 lbs. (20.4 kg)
33815CE	3	380	15	23	30	#10	45 lbs. (20.4 kg)
33818CE	3	380	18	27	35	#10	46 lbs. (20.9 kg)
34112CE	3	415	12	17	25	#10	44 lbs. (20 kg)
34115CE	3	415	15	21	30	#10	45 lbs. (20.4 kg)
34118CE	3	415	18	25	35	#10	45 lbs. (20.4 kg)