


CPH-E



COATES HEATER CO. INC.
 P.O BOX 1750
 KENT, WA 98035
 Phone (253) 872-7256
 Fax (253) 859-4660

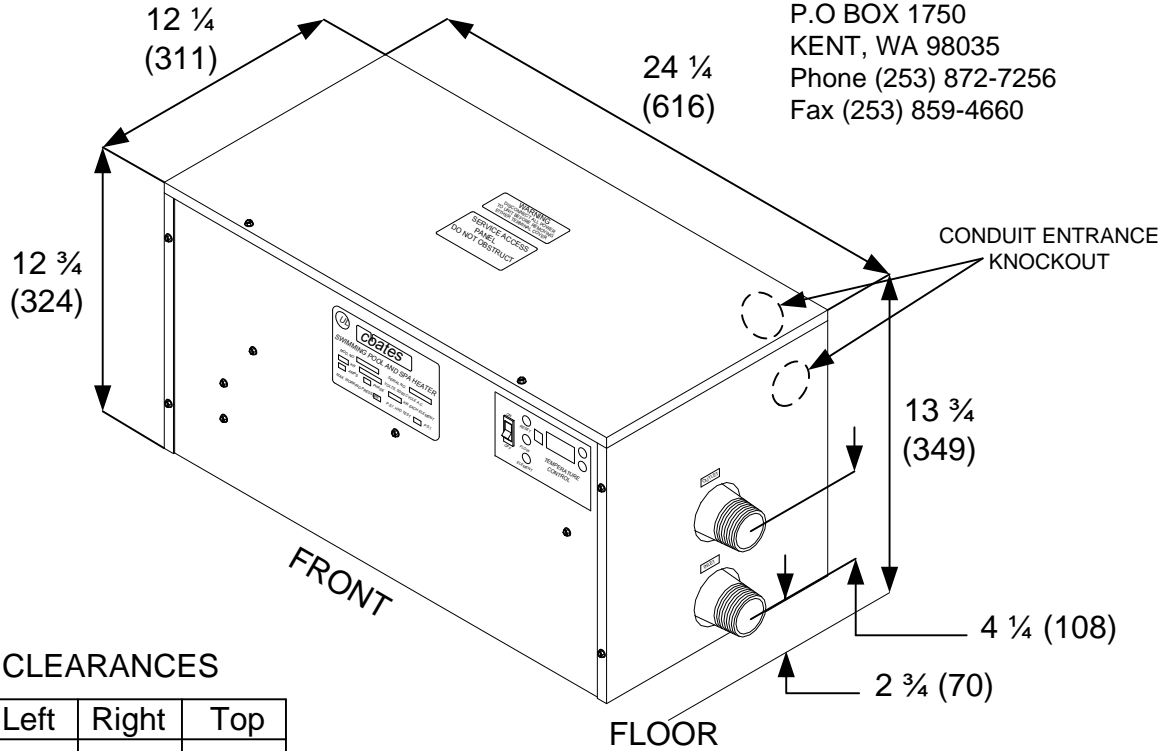

MINIMUM CLEARANCES

Front	Back	Left	Right	Top
36**	6	18	*Plumbing	18
(914)	(152)	(457)		(457)

Dimensions: Inches (mm)

*Required clearance is based on plumbing configuration used.

**Refer to NEC Table 110.26 (A)(1)

- INLET/OUTLET 1 1/2 " (38mm) NPT
- MINIMUM FLOW RATE 20 GPM
- MAXIMUM FLOW RATE 80 GPM

MODEL	PHASE	VOLTS	kW	AMPS	BREAKER	WIRE/ 75°C	SHIP WT.
32224CPH-E	3	220	24	63	80	#4	64 lbs. (29.0 kg)
32230CPH-E	3	220	30	79	100	#6	64 lbs. (29.0 kg)
33824CPH-E	3	380	24	36	45	#8	62 lbs. (28.1 kg)
33830CPH-E	3	380	30	46	60	#6	62 lbs. (28.1 kg)
34124CPH-E	3	415	24	33	45	#8	62 lbs. (28.1 kg)
34130CPH-E	3	415	30	42	60	#6	62 lbs. (28.1 kg)