


PHS-E



COATES HEATER CO. INC.
 P.O BOX 1750
 KENT, WA 98035
 Phone (253) 872-7256
 Fax (253) 859-4660

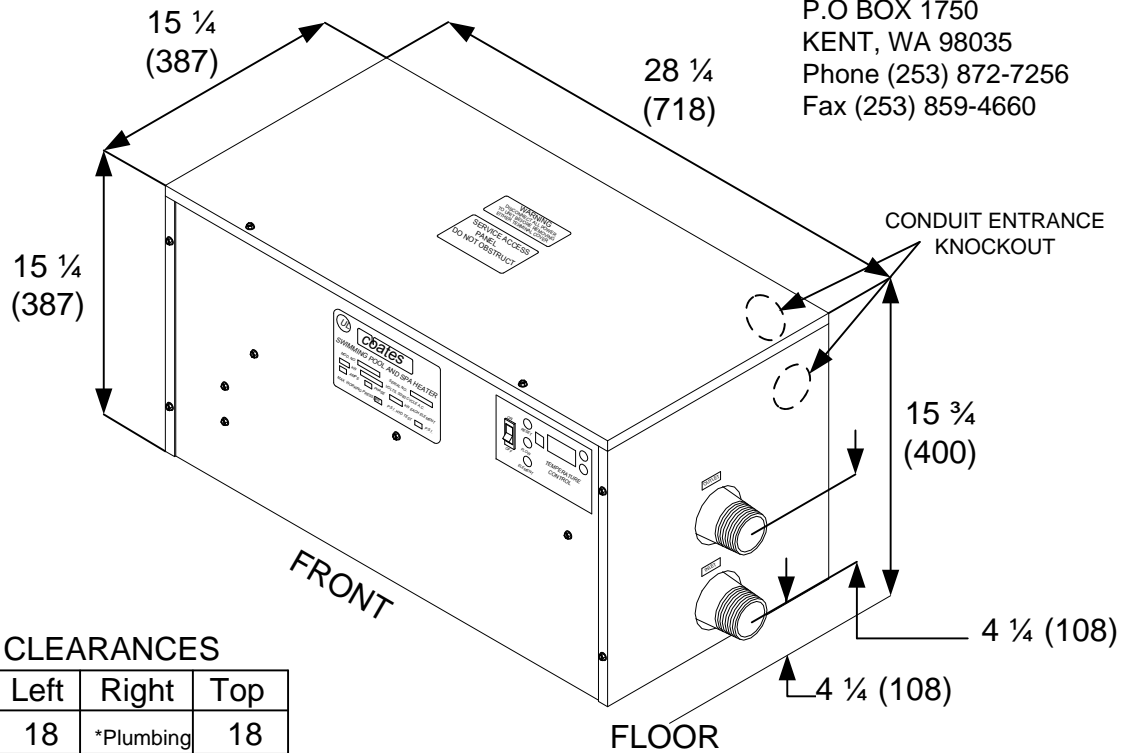

MINIMUM CLEARANCES

Front	Back	Left	Right	Top
36**	6	18	*Plumbing	18
(914)	(152)	(457)		(457)

Dimensions: Inches (mm)

*Required clearance is based on plumbing configuration used.

** Refer to NEC Table 110.26 (A)(1)

- INLET/OUTLET 2" (50mm) NPT
- MINIMUM FLOW RATE 20 GPM
- MAXIMUM FLOW RATE 80 GPM

MODEL	PHASE	VOLTS	KW	AMPS	BREAKER	WIRE/ 75°C	SHIP WT.
32236PHS-E	3	220	36	94	125	#1	88 lbs. (39.9 kg)
32245PHS-E	3	220	45	118	150	1/0	88 lbs. (39.9 kg)
32254PHS-E	3	220	54	142	200	3/0	91 lbs. (41.3 kg)
32257PHS-E	3	220	57	150	200	3/0	91 lbs. (41.3 kg)
32260PHS-E	3	220	60	157	200	3/0	93 lbs. (42.2 kg)
32272PHS-E	3	220	72	189	250	250	93 lbs. (42.2 kg)
33836PHS-E	3	380	36	55	70	#6	85 lbs. (38.6 kg)
33845PHS-E	3	380	45	68	90	#3	86 lbs. (39.0 kg)
33854PHS-E	3	380	54	82	110	#2	88 lbs. (39.9 kg)
33857PHS-E	3	380	57	87	110	#2	88 lbs. (39.9 kg)
33860PHS-E	3	380	60	91	125	#1	88 lbs. (39.9 kg)
33872PHS-E	3	380	72	109	150	1/0	93 lbs. (42.2 kg)
34136PHS-E	3	415	36	50	70	#6	86 lbs. (39.0 kg)
34145PHS-E	3	415	45	63	80	#4	86 lbs. (39.0 kg)
34154PHS-E	3	415	54	75	100	#3	89 lbs. (40.4 kg)
34157PHS-E	3	415	57	79	100	#3	89 lbs. (40.4 kg)
34160PHS-E	3	415	60	83	110	#2	89 lbs. (40.4 kg)
34172PHS-E	3	415	72	100	125	#1	91 lbs. (41.3 kg)